

EN

Special offer
valid until 31.01.2026

Highlights 2025



haupa®

Cable cutter VDE HUPtriCut



- for cutting copper/aluminium cables, fine wire, multiple-core and solid copper
- Chrome vanadium steel, dip-insulated handles
- insulating function in upper head area
- Cable measuring function thanks to the 180 degree crossover of the legs
- not for solid conductors

Art. 211225 (Art. 211223)

- Data, telephone and control cable, maximum Ø 8 mm (Ø 12 mm)
- Cu single wire, maximum 16 mm² (16 mm²)
- Cu fine wire, maximum 16 mm² (35 mm²)
- Cu multi-wire, maximum 16 mm² (25 mm²)
- Al single wire, maximum 16 mm² (25 mm²)
- Al multi-wire, maximum Ø 8 mm = 16 mm² (25 mm²)



Art. no. 211225

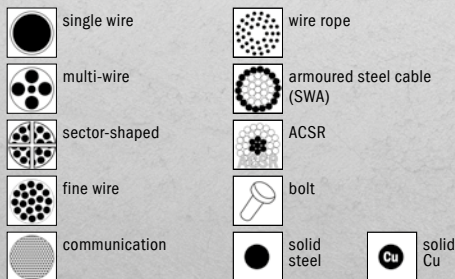

Art. no. 211225

Ø 8 mm, 160 mm

Art. no. 211223


Ø 12 mm, 200 mm

Cable cutter HUPtriCut

- for cutting copper/aluminium cables, fine wire, multiple-core and solid copper
- Chrome vanadium steel, dip-insulated handles
- insulating function in upper head area
- Cable measuring function thanks to the 180 degree crossover of the legs
- not for solid conductors

Art. 201085 (Art. 201087)

- Data, telephone and control cable, maximum Ø 8 mm (Ø 12 mm)
- Cu single wire, maximum 16 mm² (16 mm²)
- Cu fine wire, maximum 16 mm² (35 mm²)
- Cu multi-wire, maximum 16 mm² (25 mm²)
- Al single wire, maximum 16 mm² (25 mm²)
- Al multi-wire, maximum Ø 8 mm = 16 mm² (25 mm²)




Art. no. 201085
16 mm² / Ø 8 mm

Art. no. 201087
35 mm² / Ø 12 mm

Art. no. 201087

Cable cutter with a snap

- One-handed cable cutters for fine wire cables only
- Low force required
- CNC-ground cutting
- Inductively hardened blades
- Adjustable screw joint
- Cu fine wire cable, maximum Ø 16.9 mm = 70 mm²



Art. no. 201002
70 mm² / Ø 16,9 mm

haupa

... convincing solutions

Replaces entire open wrench set!
Thanks to the parallel jaws,
screw edges are not damaged!



Pliers wrench VDE

- Stepless gripping of all wrench widths thanks to the parallel jaws
- Easy tightening and releasing of screw connections
- Weight-reduced for very light working that is gentle on the joints
- Secure setting of the gripping jaws prevents the joint slipping through
- Gentle on surfaces thanks to the smooth, polished gripping surfaces
- 10-fold manual force amplification for very high clamping force
- With comfortable single-hand adjustment pushbutton
- With finger clamp protection for safe working
- Chrome-vanadium tool steel ensures high durability and a long product life
- Individually tested acc. to DIN EN IEC 60900 for working safely on live parts



Art. no. 211224

Length: 280 mm | WS: 50 mm



360° View



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

PLIERS AND WRENCH IN ONE

Gripping | Holding | Pressing | Bending workpieces

These 3 pliers wrenches are new in our portfolio for 2022. The VDE pliers wrench (art. 211224) and the pliers wrench from the basic program (art. 210619) are 260 mm long and replace wrench sets from 0 to 50 mm. The third model is the smaller and even more handy variant of the basic pliers wrench (art. 210615); it is 180 mm long and makes wrench sets of up to 36 mm.

Versatile, flexible, safe, light and gentle on the joints – make things easy and profit from the many benefits of our new pliers wrench!



Pliers wrench

- Stepless gripping of all wrench widths thanks to the parallel jaws
- Easy tightening and releasing of screw connections
- Weight-reduced for very light working that is gentle on the joints
- Secure setting of the gripping jaws prevents the joint slipping through
- Gentle on surfaces thanks to the smooth, polished gripping surfaces
- 10-fold manual force amplification for very high clamping force
- With comfortable single-hand adjustment pushbutton
- With finger clamp protection for safe working
- Chrome-vanadium tool steel ensures high durability and a long product life
- Handles in black/green soft dip insulated

Art. no. 210615

Length: 180 mm | WS: 36 mm

Art. no. 210619

Length: 260 mm | WS: 50 mm



haupa

... convincing solutions

Hand cable cutters Ø 34 mm

- Designed for cutting copper and aluminium cables according to DIN EN 60228
- Equipped with ratchet gear transmission
- Provides optimal force transmission
- Enables one-handed operation through optimal lever ratio and step-by-step cutting up to Ø 34 mm
- Release mechanism available in every cutting position

Material:


- All parts made from high-strength special steel, with hardened or tempered cutting edges and stressed components
- Burnished surfaces
- Ergonomically shaped soft handles
- Colour: black/green

Cutting range:

- Cables and insulated conductors according to DIN EN 60228
- Multi-stranded cables (Class 2; Class 5) copper up to 300 mm² (sector-shaped, fine-stranded, communication/data)
- Multi-stranded cables (Class 2; Class 5) aluminium up to 380 mm² (sector-shaped, fine-stranded, communication/data)
- Not suitable for steel or ACSR cables
- Clean the ratchet mechanism after use

Dimensions:












Length: approx. 260 mm | Width: approx. 100 mm | Depth: approx. 36 mm | Weight: approx. 600 g



Art. no. 200089-1

up to Ø 34 mm



	single wire		wire rope
	multi-wire		armoured steel cable (SWA)
	sector-shaped		ACSR
	fine wire		bolt
	communication		solid steel
			solid Cu

200183-1 | Video



The new hand cable cutters, models 200089-1 and 200183-1, featuring ratchet gear transmission, are designed for cutting copper and aluminium cables according to DIN EN 60228, with diameters of up to 34 mm and 62 mm respectively. With their carefully calibrated lever ratio, these hand cable cutters ensure optimal force transmission, allowing for effortless step-by-step cutting with just one hand. These cable cutters are equipped with ergonomically shaped soft handles, providing a comfortable grip during operation. They also feature a release mechanism that can be used in any cutting position. All parts of the cutters are made from high-strength special steel. The cutting edges and other stressed components are either tempered or hardened, while the surfaces are treated with a burnished finish. **Our new hand cable cutters are suitable for fine-stranded conductors too!**

Hand cable cutters Ø 62 mm

- Designed for cutting copper and aluminium cables according to DIN EN 60228
- Equipped with ratchet gear transmission
- Provides optimal force transmission
- Enables one-handed operation through optimal lever ratio and step-by-step cutting up to Ø 62 mm
- Release mechanism available in every cutting position

Material:

- All parts made from high-strength special steel, with hardened or tempered cutting edges and stressed components
- Burnished surfaces
- Ergonomically shaped soft handles
- Colour: black/green

Cutting range:

- Cables and insulated conductors according to DIN EN 60228
- Multi-stranded cables (Class 2; Class 5) copper up to 480 mm² (sector-shaped, fine-stranded, communication/data)
- Multi-stranded cables (Class 2; Class 5) aluminium up to 480 mm² (sector-shaped, fine-stranded, communication/data)
- Not suitable for steel or ACSR cables
- Clean the ratchet mechanism after use

Dimensions:


Length: approx. 297 mm | Width: approx. 163 mm | Depth: approx. 36 mm | Weight: approx. 800 g

Art. no. 200183-1

up to Ø 62 mm



Ø
62



haupa

... convincing solutions

Battery powered cable cutter AS-52

- for copper and aluminium cable, multi wire
- diameter up to 52 mm

Scope of delivery:

1 cutting tool, 1 quick charger,
1 battery 18 V Li-Ion, 4 Ah, in SysCon tool box



Art. no. 216434-1

Ø 52 mm



Battery powered cable cutter AS-52F

- for copper and aluminium cable
- with blades for fine-stranded cables

Scope of delivery:

1 cutting tool, 1 quick charger,
1 battery 18 V Li-Ion, 4 Ah, in SysCon tool box



Art. no. 216436/F-1

Ø 52 mm



Battery powered cable cutter AS-52ACSR

- Diameter 18,6 mm / 120 mm²
- ACSR 19 mm steel cables
- not suitable for Cu/Al

Scope of delivery:

1 cutting tool, 1 quick charger,
1 battery 18 V Li-Ion, 4 Ah, in SysCon tool box



Ø
18,6

AL
Fe



LI-ION
18V
4Ah



Art. no. 216436-1

Ø 18,6 mm



Battery powered cable cutter AS-65

- for copper and aluminium cable, multi wire
- diameter up to 65 mm

Scope of delivery:

1 cutting tool, 1 quick charger,
1 battery 18 V Li-Ion, 4 Ah, in SysCon tool box




Ø
65

Cu
AL



LI-ION
18V
4Ah



Art. no. 216435-1

Ø 65 mm



haupa

... convincing solutions

Cable stripper Kabifix

- For cutting opening and stripping cables from Ø 6 – 25 mm
- Longitudinal and round cut
- Ø 6 – 28 mm • NYY 4 – 16 mm² • NYM 5 – 16 mm²
- Coaxial and bell round cable
- Isoflex and PVC piping maximum Ø 25 mm
- Interior adjustment screw for adjusting the cutting depth
- Exchangeable blades

Art. no. 200022

Ø: 6 – 28 mm



Cable stripping knife

- For removing the sleeve from all current round cables
- Blades, titanium nitride coated, thanks to the higher cutting speed
- Lower wear, increased durability
- Cutting depth can be adjusted using the setting screw on the end of the handle
- Automatic adjustment to round and lengthwise cuts
- Handle security thanks to soft component insert on the bar and handle
- Titanium nitride coated replacement blade in the housing
- Housing made from high-quality, hard wearing polyamide
- With titanium nitride coated hook blade

Art. no. 200031

Ø: 8 – 28 mm

Video 200031



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Stripper All-rounder

- Cable stripper for round cables from Ø 4 – 15 mm and flat cables up to 15 mm width
- Stripping 1.5 – 2.5 mm² single wire
- Lengthwise cut

Video 200050



Art. no. 200050

Ø: 4 – 15 mm



Universal stripper

- Stripper for removing the sleeve from all current round cables Ø 8 to 13 mm
- Removing the insulation on various cable types, e.g. NYM 3 x 1.5 mm² to 5 x 2.5 mm²
- Contoured blades for stripping wires 0.2 – 0.3 – 0.8 – 1.5 – 2.5 – 4.0 mm²
- Ideal for working in distribution and junction boxes
- Longer cable lengths can be stripped using the lengthwise cutting mechanism
- Safe hold thanks to the inclusion of anti-slip handle zones
- No need to set blades required to cutting depth
- Additional titanium nitride coated retractable blade

Video 200043



Art. no. 200043

Ø 8 – 13 mm



Automatic cable stripper

- for stripping fine wires and solid cables 0.03 – 10 mm²
- automatic setting to the cross-section
- integrated side cutter of up to 6 mm²
- With stripping lengthwise stop

Art. no. 211934

0,03 – 10 mm²



Automatic cable stripper

- for stripping fine wires and solid cables 0.08 – 6 mm² | 6 – 16 mm²
- automatic setting to the cross-section
- integrated side cutter of up to 6 mm²
- With stripping lengthwise stop

Art. no. 211930

0,08 – 6 mm²

Art. no. 211932

6 – 16 mm²



Automatic wire stripper Super 4 Pro

for solid and flexible conductors and strands between 0.2 and 6.0 mm² (AWG 24 – 10)

- For fast and precise stripping even of difficult – to-access places
- No adjustment to wire cross section necessary
- Suitable for cables with insulation made from PVC and other materials
- Special scanning system, therefore no damage to conductors
- Adjustable longitudinal stop from 6.0 to 15.0 mm for even serial stripping
- External side cutters for conductors up to 2.5 mm²
- Body of pliers made from fibre-glass reinforced polyamide

Art. no. 210698

0,2 – 6 mm²




haupa.com


HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Crimping pliers for end sleeves



precise crimping profile, automatic setting to the conductor cross-section, unlockable forced lock, guarantees connections that meet DIN, high transmission and ergonomically shaped plastic handles for fatigue free working.

 **211816 square pressing**
0,08 – 16 mm² | TWIN 2 x 0,25 – 6 mm²

 **211818 hexagon pressing**
0,08 – 16 mm² | TWIN 2 x 0,25 – 10 mm²



Art. no. 211816

0,08 – 16 mm²

Art. no. 211818

0,08 – 16 mm²



Crimping pliers HUPsquare10



for end sleeves, precise square pressing profile, automatic setting to the conductor cross-section, unlockable forced lock, guarantees connections that meet DIN, high transmission and ergonomically shaped plastic handles for fatigue free working, **square pressing**, TWIN 2x4 mm²



Art. no. 212804

0,08 – 10 mm²



Crimping pliers HUPsquare16



for end sleeves, precise square pressing profile, automatic setting to the conductor cross-section, unlockable forced lock, guarantees connections that meet DIN, high transmission and ergonomically shaped plastic handles for fatigue free working, **square pressing**, TWIN 2x4 mm²



Art. no. 212806

0,5 – 16 mm²



haupa

... convincing solutions

Dispenser box with insulated end sleeves (DIN)

Contents: Colour range III, DIN

50 pcs	white,	0,5 mm ² ,	art. 270800
100 pcs	grey,	0,75 mm ² ,	art. 270802
100 pcs	red,	1,0 mm ² ,	art. 270804
100 pcs	black,	1,5 mm ² ,	art. 270807
50 pcs	blue,	2,5 mm ² ,	art. 270810



Art. no. 270854

400 pcs



Dispenser box with Twin end sleeves (DIN)

Contents: Twin end sleeves, Colour range III, DIN

50 pcs	grey,	0,75 mm ² ,	art. 270780
50 pcs	red,	1,0 mm ² ,	art. 270784
50 pcs	black,	1,5 mm ² ,	art. 270788
50 pcs	blue,	2,5 mm ² ,	art. 270792



Art. no. 270795

200 pcs



Slide Box with DIN end sleeves

The transparent sliding lids enable easy access and prevent the contents from becoming mixed up. 5 separate compartments. Dimensions: 165 x 58 x 38 mm (L x W x H)

Contents: Colour range III, DIN

50 pcs	white,	0,5 mm ² ,	art. 270800
100 pcs	grey,	0,75 mm ² ,	art. 270802
100 pcs	red,	1,0 mm ² ,	art. 270804
100 pcs	black,	1,5 mm ² ,	art. 270807
50 pcs	blue,	2,5 mm ² ,	art. 270810



Art. no. 270864

400 pcs



HUPcompact HC01

- for insulated cable lugs and connectors
- **oval pressing**



100 %
parallel

5
kN

LONG LIFE
50000
X

Art. no. 213090

Ø: 0,1 – 6 mm²



HUPcompact HC02

- for end sleeves
- **trapezoidal pressing**
- (10 + 16 mm² wave profile/0.5 – 6 mm² trapezoidal profile)



100 %
parallel

5
kN

LONG LIFE
50000
X

Art. no. 213088

Ø: 0,25 – 16 mm²



HUPcompact HC03

- for non insulated cable lugs and connectors
- **mandrel shape pressing**



DIN
46234

DIN
46341

100 %
parallel

5
kN

LONG LIFE
50000
X

Art. no. 213092

Ø: 0,75 – 10 mm²



HUPcompact HC04

- for open brass tab connectors
- with locator
- **roll pressing**



100 %
parallel

5
kN

LONG LIFE
50000
X

Art. no. 213094

Ø: 0,5 – 6 mm²



Crimpset X-Crimp



Art. no. 211692

Including nylon bag

Crimping pliers used to quickly change HAUPA precision pressing inserts. Supplied in robust nylon bag (article 220260).

- Reliable crimping results just like with fixed pressing inserts
- Forced lock ensures standardised pressing actions
- Flat construction enables you to work precisely even when space is at a premium

Content:

Art. 211690

Art. 210763/E



0,5–4
mm²

M
210

Art. 210765/E



6–16
mm²

M
210

Art. 210764/E



1–10
mm²

M
210

Art. 210761/E



0,5–6
mm²

M
210

Video 211692



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Battery powered crimping tool SDE 240-6M

Crimping head can be rotated by 180°, with fast opening, return manually once compressing is complete, no inserts required, **mandrel shape pressing**.

Extent of supply:

- 1 crimping tool,
 - 1 charger,
 - 1 battery,
 - 1 strap,
- in SysCon stacking box SysCon M art. 220372 without inserts.

Technical data:

- Pressing force in kN: 60
- Working pressure in bar: 700
- Head can be opened: yes
- Pressing time, battery-operated in seconds: ca. 5
- Battery charging time in minutes: 30
- Battery type: Li-Ion, 18 V, 2 Ah
- With the new HAUPA battery item no. 215523 and charger item no. 215527
- Cable lugs: standard Cu 10 – 240 / DIN Al 50 – 240 mm²
- Connectors: standard Cu 10 – 240 / DIN Al 50 – 240 mm²
- Crimp ring terminals without insulation DIN 46234
- Dimensions: 455 x 75 mm



HAUPA batteries are compatible with the MAKITA charging technology and can be used in all 18 V Li-ion systems.

Variant **216669-1** contains:

- Machine
- System case incl. insert
- Battery and charger



Variant **216669-1-NO** contains:

- Machine
- System case incl. insert
- **No** battery and **no** charger



Art. no. 216669-1

Base Tool

incl. battery and charger in case

Art. no. 216669-1-N

Base Tool

Machine in transport packaging

Art. no. 216669-1-NO

Base Tool

without battery, without charger



Variant **216669-1-N** contains:

- Machine in transport packaging



haupa
... convincing solutions

Battery powered crimping tool SDE 240-6M

Sensor

Crimping head can be rotated by 180°, with fast opening, return manually once compressing is complete, no inserts required, **mandrel shape pressing**.




Extent of supply:

- 1 crimping tool,
- 1 charger,
- 1 battery,
- 1 strap,
- in SysCon stacking box SysCon M art. 220372 without inserts.

Technical data:


- Pressing force in kN: 60
- Working pressure in bar: 700
- Head can be opened: yes
- Pressing time, battery-operated in seconds: ca. 5
- Battery charging time in minutes: 30
- Battery type: Li-Ion, 18 V, 2 Ah
- With the new HAUPA battery item no. 215523 and charger item no. 215527
- Cable lugs: standard Cu 10 - 240 / DIN Al 50 - 240 mm²
- Connectors: standard Cu 10 - 240 / DIN Al 50 - 240 mm²
- Crimp ring terminals without insulation DIN 46234
- Dimensions: 455 x 75 mm

With the different colours of the sensor LED, it shows whether the pressing has been completed successfully or which errors have occurred:

-  Light is green: Pressing completed as standard, motor stopped.
-  Light is orange: Battery voltage not sufficient
-  Light is red: Pressing interrupted before completed

The device also has 1 white LED designed to illuminate the working area.

Video 216669/M

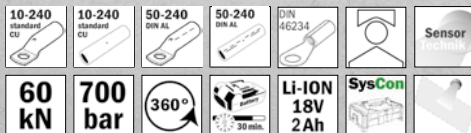

Art. no. 216669/M-1

Base Tool

incl. battery and charger in case

Art. no. 216669/M-1-N

Base Tool

Machine in transport packaging

Art. no. 216669/M-1-N0

Base Tool

without battery, without charger



Smart Battery powered crimping tool universal US-6M

Sensor

Hydraulics for interchangeable pressing tools, crimping head can be rotated by 180°, with fast opening, manual return flow after perfect pressure.

- **for 7 different interchangeable heads**
(item no. 216761, item no. 216762, item no. 216762/32ACSR, item no. 216763, item no. 216764, item no. 216665-U, item no. 216666-U)
- Heads can be changed easily
- Can be locked using 2 extractable pins
- With the new HAUPA battery item no. 215523 and charger item no. 215527
- Pressing load kN: 60
- Working pressure in bar: 700

With the different colours of the sensor LED, it shows whether the pressing has been completed successfully or which errors have occurred:

- Light is green: Pressing completed as standard, motor stopped.
- Light is orange: Battery voltage not sufficient
- Light is red: Pressing interrupted before completed

The device also has 1 white LED designed to illuminate the working area.

Video 216760-1



HAUPA batteries are compatible with the MAKITA charging technology and can be used in all 18 V Li-ion systems.

Art. no. 216760-1

Base Tool
incl. battery and charger in case

Art. no. 216760-1-N

Base Tool
Machine in transport packaging

Art. no. 216760-1-N0

Base Tool
without battery, without charger

7in1



haupa

... convincing solutions

Crimping headstock U-KO-6



300-06

Pressing head for interchangeable pressing applications, with quick opening, without inserts.

- Pressing force in kN: 60 kN
- Head can be opened
- Opening / Hub: 17 mm
- Pressing width: slim
- Cable lugs: standard Cu 6 – 300 mm² / DIN Cu 6 – 300 mm² / DIN Al 16 – 300 mm²
- Connectors: standard Cu 6 – 300 mm² / DIN Cu 6 – 300 mm² / DIN Al 16 – 300 mm²



Art. no. 216761


for 216760-1



Crimping headstock U-KDE240-6

Pressing head with quick opening, indent v-shape pressing, no inserts required.

- Pressing force in kN: 60 kN • Head can be opened
- Crimp ring terminals without insulation DIN 46234, 10 – 240 mm²
- Cable lugs: standard Cu 10 – 240 mm² / DIN Al 50 – 240 mm²
- Connectors: standard Cu 10 – 240 mm² / DIN Al 50 – 240 mm²



Art. no. 216763

for 216760-1



Crimping headstock U-KD300-6

Pressing head 4-mandrel U-KD300-6 for exchange head system US-6M (216760-1), insert does not need to be changed, mandrel pressing.

- Pressing force in kN: 60 kN
- Cable lugs: standard Cu 16 – 300 mm²
- Connectors: standard Cu 16 – 120 mm²



Art. no. 216665-U

for 216760-1



Crimping headstock U-HKD400-6

Pressing head 4-mandrel U-HKD400-6 for exchange head system US-6M (216760-1), insert does not need to be changed, mandrel pressing.

- Pressing force in kN: 60 kN
- Head can be opened
- Cable lugs: standard Cu 25 – 400 mm²
- Connectors: standard Cu 25 – 400 mm²



Art. no. 216666-U

for 216760-1



Cutting headstock U-KS6-S50

- for copper and aluminium cable
- multi-wiring
- sector-shaped



Ø
50

Art. no. 216762

for 216760-1



Punching headstock U-S-6

without inserts, 1 connecting rod 3/8-24 UNF (article no. 217660), 1 connecting rod 3/4-16 UNF (article no. 217662), 1 adapter (article no. 217664), 1 spacer bushing (article no. 217666).

Advantages:

- Head can be rotated by 360°
- Flexible aluminium head

Stamping capacity:

- for steel plate up to max. thickness of 3.2 mm
- for stainless steel up to max. thickness of 1.6 mm
- from Ø 12 mm to max. 50 mm punching die



Art. no. 216764

for 216760-1



haupa

... convincing solutions


Universal set 1

Sensor

Hydraulics for interchangeable pressing tools, crimping head can be rotated by 180°, with fast opening, manual return flow after perfect pressure.

Consists of Art. 216760-1, Art. 216763 and Art. 216762 in one SysCon system container, incl. insert.

- Heads can be changed easily
- Can be locked using 2 extractable pins
- With the new HAUPA battery item no. 215523 and charger item no. 215527
- Pressing load kN: 60
- Working pressure in bar: 700

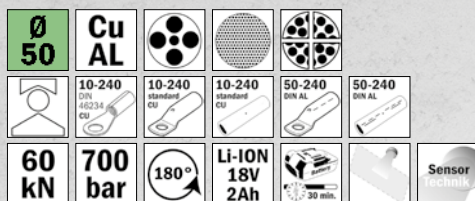

Art. no. 216766

3 pieces

SysCon



Universal set 2

Sensor

Hydraulics for interchangeable pressing tools, crimping head can be rotated by 180°, with fast opening, manual return flow after perfect pressure.

Consists of Art. 216760-1, Art. 216761 and Art. 216762 in one SysCon system container incl. insert.

- Heads can be changed easily
- Can be locked using 2 extractable pins
- With the new HAUPA battery item no. 215523 and charger item no. 215527
- Pressing load kN: 60
- Working pressure in bar: 700



Art. no. 216767

3 pieces

SysCon



Smart Battery powered crimping tool S0-6


Hydraulic for interchangeable dies, crimping head 180° swivelling, Head can be opened, manual return flow after perfect pressure.

Extent of supply:

- 1 crimping tool,
- 1 charger,
- 1 battery,
- 1 strap,
- in SysCon stacking box SysCon M art. 220372 without inserts.

Technical data:

- Pressing force in kN: 60
- Working pressure in bar: 700
- Head can be opened yes
- Opening/ Hub: 17 mm
- Pressing width: slim
- Pressing time, battery-operated in seconds: ca. 5
- Battery charging time in minutes: 30
- Battery type: Li-Ion, 18 V, 2 Ah
- Cable lugs: standard Cu 6-300
DIN Cu 6-300 • DIN Al 16-300
- Connectors: Cu 6-300
DIN Cu 6-300 • DIN Al 16-300
- Dimensions: 383 x 75 mm
- Weight in kg: 3,0
- Weight of set in kg: 7,1

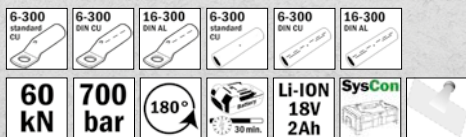

HAUPA batteries are compatible with the MAKITA charging technology and can be used in all 18 V Li-ion systems.

Art. no. 216801-1

Base Tool

incl. battery and charger in case

Art. no. 216801-1-N

Base Tool

Machine in transport packaging

Art. no. 216801-1-N0

Base Tool

without battery, without charger



haupa

... convincing solutions

Crimping dies set Standard Cu



13 standard crimping dies in practical transport case



Art. no.	mm ²	PW	PU	
216806	6	5	Cu	1 pair
216808	10	5	Cu	1 pair
216810	16	5	Cu	1 pair
216812	25	5	Cu	1 pair
216814	35	5	Cu	1 pair
216816	50	5	Cu	1 pair
216818	70	5	Cu	1 pair
216820	95	5	Cu	1 pair
216822	120	5	Cu	1 pair
216824	150	5	Cu	1 pair
216826	185	5	Cu	1 pair
216828	240	5	Cu	1 pair
216830	300	5	Cu	1 pair

Art. no. 216805-SET


Set: 14-pieces, 6 – 300 mm²



Crimping dies set DIN Cu



12 DIN-Crimping dies in practical transport case



Art. no.	mm ²	PW	Id.	PU	
216834	10	5	6	Cu	1 pair
216836	16	5	8	Cu	1 pair
216838	25	5	10	Cu	1 pair
216840	35	5	12	Cu	1 pair
216842	50	5	14	Cu	1 pair
216844	70	5	16	Cu	1 pair
216846	95	5	18	Cu	1 pair
216848	120	5	20	Cu	1 pair
216850	150	5	22	Cu	1 pair
216852	185	5	25	Cu	1 pair
216854	240	5	28	Cu	1 pair
216856	300	5	32	Cu	1 pair

Art. no. 216831-SET

Set: 13-pieces, 10 – 300 mm²



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
 Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
 Prices upon request. Sales are conducted exclusively through specialized wholesalers.
 Technical changes and printing errors reserved.

Dies for terminals and compacted connectors

for standard tube terminals and compacted connectors, also for thinned, compacted conductors, in practical transport case



Art. no.	mm ²	PW	PU	
216806/V	6	5	Cu	1 pair
216808/V	10	5	Cu	1 pair
216810/V	16	5	Cu	1 pair
216812/V	25	5	Cu	1 pair
216814/V	35	5	Cu	1 pair
216816/V	50	5	Cu	1 pair
216818/V	70	5	Cu	1 pair
216820/V	95	5	Cu	1 pair
216822/V	120	5	Cu	1 pair
216824/V	150	5	Cu	1 pair
216826/V	185	5	Cu	1 pair
216828/V	240	5	Cu	1 pair
216830/V	300	5	Cu	1 pair



Art. no. 143050

TL: 40 m, Ø 4,5 mm



Art. no. 143052

TL: 60 m, Ø 4,5 mm



Art. no. 143054

TL: 80 m, Ø 4,5 mm



Cable pulling device FOX

Cable pulling device FOX with glass fibre rod Ø 4.5 mm and green PP coating RAL 6018, with zinc-plated steel winder Ø 330 mm, standing version, complete with front/end sleeve M5 and pulling head M5 with loop




haupa

... convincing solutions

Cable pulling device HAUPA PullTec

with special plastic coating, M5 thread and probe, in durable plastic housing, colour: black

Single Composite

 4,0 mm, green

- Breaking load: 300 kg

The advantages of the HAUPA PullTec at a glance:

- Material: Coated with a special plastic
- Slides very well and is highly elastic
- Low friction
- Does not break or bend
- M5 thread
- With probe
- In durable plastic housing



Art. no. 143500

TL: 20 m, Ø 4,0 mm

Art. no. 143502

TL: 30 m, Ø 4,0 mm



Cable pulling device HAUPA PullTec

with special plastic coating, M5 thread and probe, in durable plastic housing, colour: black


Single Composite

 5,2 mm, black

- Breaking load: 350 kg



does not break or bend



Breaking strength: 350 kg

Art. no. 143506

TL: 30 m, Ø 5,2 mm



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Decoiler 1200

The front and the rear sides are made of anodized aluminum with antiskid ribs. For the left and the right side, sink steel with powder coating has been used. Because of this construction, the decoilers are strong, flexible to use, and resistant against heavy circumstances. The roles have bearings and a sliding axis, which make it easy to change the position of the roles without any special tools. Four antiskid buffers ensure that vibrations are subdued and floors remain intact.

Technical data:

Length: 610 mm

Width: 570 mm

Height: 115 mm

Drum/width: 560 mm

Drum-Ø: 1200 mm

Drum/kg: 175

Art. no. 143400

Weight: 9 kg



Decoiler 1200+

The front and the rear sides are made of anodized aluminum with antiskid ribs. For the left and the right side, sink steel with powder coating has been used. Because of this construction, the decoilers are strong, flexible to use, and resistant against heavy circumstances. The roles have bearings and a sliding axis, which make it easy to change the position of the roles without any special tools. Four antiskid buffers ensure that vibrations are subdued and floors remain intact.

Technical data:

Length: 705 mm

Width: 670 mm

Height: 115 mm


Drum/width: 660 mm

Drum-Ø: 1200 mm

Drum/kg: 300

Art. no. 143402

Weight: 10,5 kg

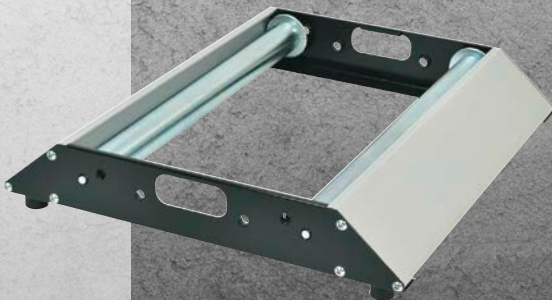

VarioPro 1000 V replaceable blade system

VarioPro

Art. no. 102052

30-pieces

The VarioPro replaceable blade system with insulated replaceable blades, switching cabinet key is integrated into the system, VDE pliers set and voltage tester.

Content: 30 pcs.

- Slot: 0.4 x 2.5 x 100, 0.5 x 3.0 x 100, 0.6 x 3.5 x 100, 0.8 x 4.0 x 100, 1.0 x 5.5 x 100, 1.2 x 6.5 x 100
- Phillips: 0 x 100, 1 x 100, 2 x 100
- Pozidriv: 0 x 100, 1 x 100, 2 x 100
- PZ/FL 1, PZ/FL 2
- Tx: 8 x 100, 9 x 100, 10 x 100, 15 x 100, 20 x 100, 25 x 100, 30 x 100
- Square: 8 x 47
- Double-bit: 5,3 x 47
- Screw cap, additional screw cap when using as precision tool (electronics)
- 2-component exchangeable handle: 120 mm
- Voltage testers VDE/GS: 100700, 125-250 V
- VDE 2C pliers: 211200*, 211204*, 211208*, 211214



* High leverage | perfected cutting force performance (high leverage pliers offer power saving of up to 50%)



1000 V IEC 60900

Placeholders for
torque handle



VarioPro 1000 V replaceable blade system + TQ-Handle

VarioPro

Art. no. 102052/TQ

31-pieces

The VarioPro replaceable blade system with insulated replaceable blades, switching cabinet key is integrated into the system, plus VDE pliers set. **Including a TQ-Handle (Art. no. 102790, 1 - 6 Nm) and Square socket key.**

Content: 31 pcs.

- Slot: 0.4 x 2.5 x 100, 0.5 x 3.0 x 100, 0.6 x 3.5 x 100, 0.8 x 4.0 x 100, 1.0 x 5.5 x 100, 1.2 x 6.5 x 100
- Phillips: 0 x 100, 1 x 100, 2 x 100
- Pozidriv: 0 x 100, 1 x 100, 2 x 100
- PZ/FL 1, PZ/FL 2
- Tx: 8 x 100, 9 x 100, 10 x 100, 15 x 100, 20 x 100, 25 x 100, 30 x 100
- Square: 8 x 47
- Double-bit: 5,3 x 47
- Screw cap, additional screw cap when using as precision tool (electronics)
- 2-component exchangeable handle: 120 mm
- 2-component exchangeable torque handle: 120 mm
- Square socket key
- VDE 2C pliers: 211200*, 211204*, 211208*, 211214



* High leverage | perfected cutting force performance (high leverage pliers offer power saving of up to 50%)



1000 V IEC 60900



Including torque handle !



TQ



haupa

... convincing solutions


HAUPA Vario 1000 V replaceable blade system

Vario

in robust nylon bag. Contents: 2C exchangeable handle, screw cap, replaceable blade – slotted blade 0.4 x 2.5 / 0.5 x 3.0 / 0.8 x 4.0 / **PH1 / PH2 or PZ1 / PZ2**, PZ/FL 2, switch cabinet key – square 1, double-bit

Further characteristic feature include:

- High level of safety
- Exchangeable cap for use as an electronics screwdriver
- Switching cabinet key is integrated into the system
- Space-saving
- Weight-saving
- Cost-effective price/performance ratio
- Meets all relevant standards

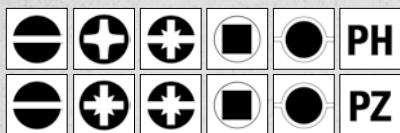

1000 V IEC 60900



Art. no. 102000-1

Phillips, 10-pieces

Art. no. 102000/PZ-1

Pozidriv, 10-pieces



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

VarioTQ dynamometric screwdriver with replaceable blades


VarioTQ

insulated replaceable blade made from molybdenum vanadium steel, hardened, blasted, with hexagonal shaft, in robust nylon bag.

- torque can be set using a separate key
- scale value can easily be read off
- clearly perceptible and audible signal when the set torque is achieved
- torque accuracy according to EN ISO 6789:2003

Contents: 12-pieces

- 2-component exchangeable handle (1000 V)
1 – 6 Nm or 0,5 – 3,5 Nm
- slotted 0.4 x 2.5 / 0.5 x 3.0 / 0.8 x 4.0 / 1.0 x 5.5 / 1.2 x 6.5
- PH0 / PH1 / PH2 or PZ0 / PZ1 / PZ2
- PZ/FL 1
- PZ/FL 2
- Square socket key

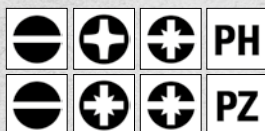

1000 V IEC 60900

Art. no. 102700-1

Phillips, 1 – 6 Nm



Art. no. 102700/PZ-1

Pozidriv, 1 – 6 Nm



Art. no. 102701-1

Phillips, 0,5 – 3,5 Nm



Art. no. 102701/PZ-1

Pozidriv, 0,5 – 3,5 Nm



TQ



haupa

... convincing solutions

Tool case 1000 V, 1/4"

1/4"

Art. no. 220576

18-pieces

made of plastic, complete with 1/4" tools. The plastic material used for socket sets is guaranteed to pass -40°C impact tests. This guarantee that the insulation value will not be compromised due to impact. Dimension: 286 x 255 x 54 mm.

Contents:

- Reversible ratchet 150 mm, 1/4"
- T-slip-on-keys 125 mm, 1/4"
- Extension 100 and 150 mm, 1/4"
- Sockets 1/4", 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- Dies for hexagon screws 1/4", 3, 4, 5, 6 mm

Video 220576



1000 V IEC 60900



Tool case 1000 V, 1/2"

1/2"

Art. no. 220404

20-pieces

made of plastic, complete with 1/2" tools. The plastic material used for socket sets is guaranteed to pass -40°C impact tests. This guarantee that the insulation value will not be compromised due to impact. Dimension: 380 x 316 x 61 mm.

Contents:

- Reversible ratchet 250 mm, 1/2"
- T-slip-on-keys 200 mm, 1/2"
- Extension 125 and 250 mm, 1/2"
- Sockets 1/2", 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 32 mm
- Dies for hexagon screws 1/2", 4, 5, 6, 8, 10 mm

Video 220404



1000 V IEC 60900



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Tool case 1000 V, 3/8"

3/8"

Art. no. 220402

16-pieces

made of plastic, complete with 3/8" tools. The plastic material used for socket sets is guaranteed to pass -40°C impact tests. This guarantee that the insulation value will not be compromised due to impact. Dimension: 286 x 255 x 54 mm.

Contents:

- Reversible ratchet 200 mm, 3/8"
- T-slip-on-keys 200 mm, 3/8"
- Extension 150 and 250 mm, 3/8"
- Sockets 3/8", 8, 10, 12, 13, 14, 17, 19, 22 mm
- Dies for hexagon screws 3/8", 4, 5, 6, 8 mm

Video 220402



1000 V IEC 60900



Torque wrench 1000 V

3/8"

Art. no. 220415

10 - 50 Nm

10 - 50 Nm, full insulated, from shock-resistant plastic. The achievement of the set torque is made noticeable by a clearly audible or tactile mechanism.

10-50 Nm TQ

1000 V 3/8"

360° | 220415



1000 V IEC 60900



haupa

... convincing solutions

Security lock | Shackle Ø 4.7 mm

Zenex padlock

- Locking system with differently locking locks
- Contents: 1 key (1 operator = 1 padlock = 1 key)
- Spark-free padlock suitable for use in explosive atmospheres
- Non-magnetic
- Body made of thermoplastic composite material resistant to corrosion, UV exposure, temperatures from -40°C to +90°C and chemicals
- Includes writeable labels with Danger / Property of in EN, FR, and SP

Art. no. 120155

Ø 4,76 | 35 x 86 mm

NEW



Security lock | Shackle Ø 6 mm

Zenex padlock

- Locking system with differently locking locks
- Contents: 1 key (1 operator = 1 padlock = 1 key)
- Key retention ensures that the lock doesn't unintentionally remain unlocked
- Spark-free padlock suitable for use in explosive atmospheres
- Non-magnetic
- Body made of thermoplastic composite material resistant to corrosion, UV exposure, temperatures from -40°C to +90°C and chemicals
- Includes writeable labels with Danger / Property of in EN, FR, and SP

Art. no. 120156

Ø 6 | 38 x 82 mm

NEW



Aluminium lockout hasp

Safety lockout hasp, aluminium, clip with diameter 2.71 cm, red handle, for 6 padlocks with max. 6 mm shackle diameter

- Safety lockout for an effective multi-person lockout
- In the event of maintenance/repair, the system remains inoperable until the last lock has been removed

Art. no. 120157

Ø 6 | for 6 locks

NEW



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Plastic lockout hasp


Non-conductive nylon lockout hasp, dielectric protection, spark-free - for 6 padlocks with a maximum shackle diameter of 6 mm

- Safety lockout for an effective multi-person lockout
- In the event of maintenance/repair, the system remains inoperable until the last lock has been removed
- Suitable for use in potentially explosive atmospheres

Art. no. 120158

Ø 6 | for 6 locks

NEW

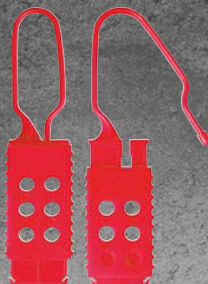

Safety lockout for circuit breaker

Universal lock for mini circuit breakers

- Quick and easy installation, no tools necessary
- Padlock can be installed horizontally or vertically to suit all applications
- Suitable for use in potentially explosive atmospheres

Art. no. 120159

Ø 6 | for 2 locks

NEW



Safety lockout for standard circuit breakers

Designed for standard circuit breakers

- Effective lockout of circuit breakers
- Durable construction with powder-coated, reinforced polymer for use in extreme environmental conditions
- Suitable for use in potentially explosive atmospheres

Art. no. 120170

Ø 6 | for 1 lock

NEW



haupa

... convincing solutions

Lockout device for 120 – 240 V plug

Cover for electrical plug connection, small - 120 to 240 V plug connections

- Unique rotating design for easy handling
- Installation for applications in tight spaces
- Durable, lightweight, dielectric Zenex body is resistant to chemicals



Art. no. 120171

120 – 240 V

NEW



Lockout device for 16 – 32 A CEE plug

Cover for electrical plug connection, large - 240 and 550 V

- Unique rotating design for easy handling
- Installation for applications in tight spaces
- Durable, lightweight, dielectric Zenex body is resistant to chemicals

Art. no. 120172

240 and 550 V

NEW



Adjustable multi-lock cable

Adjustable cable lockout (1.8 m) for various security lockout applications

- Adjustable cable length (braided steel cable 1.8 m x Ø 4 mm with plastic coating)
- Thermoplastic Zenex body is chemical resistant
- Flexible and easy insertion into various lockout points
- Integrated safety hasp for up to 4 padlocks with a max. shackle diameter of 6 mm
- Ideal for multiple lockout situations
- Comes with reusable, writeable safety labels (EN, FR, SP)
- Suitable for use in potentially explosive atmospheres

Art. no. 120173

Ø 6 | 1,8 m x Ø 4 mm

NEW



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Security lockout set

Set of lockout devices for electrical systems – Blister-pack – English

Content:

- 1 keyed-alike Zenex padlocks
- 1 mini circuit breaker lockouts
- 1 circuit breaker lockout for large circuit breakers
- 2 Warning tags/signs
- 1 plastic lockout hasp for four padlocks
- 1 compact red belt pouch



Art. no. 120174

7 pieces

NEW

Do not operate sign | English

Lockout tags in English

(each bag contains 12 tags) Danger – Do not operate

Art. no. 120175

146 x 80 mm

NEW



Do not operate sign | German

Lockout tags in German

(each bag contains 12 tags) Gefahr – nicht bedienen

Art. no. 120176

146 x 80 mm

NEW



Do not operate sign | Spanish

Lockout tags in Spanish

(each bag contains 12 tags) Peligro – no hacer funcionar

Art. no. 120177

146 x 80 mm

NEW



haupa

... convincing solutions

Set with 7 tools



Art. no. 212683/Z1

7-pieces

Screwdrivers set 1000 V, Phillips, 6 pieces

Content: Electricians' screwdriver 1000 V, 2.5 x 75 mm /
4 x 100 mm / 5.5 x 125 mm / 6.5 x 150 mm, Cross slotted
screwdrivers 1000 V, Phillips size 1 and 2

Automatic wire stripper

- for solid and flexible cables
- automatic setting to the cross-section
- Working range of 0.5 to 6 mm² (212695)
- integrated side cutter up to 2.5 mm²



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Hexagon angle screwdriver set, with spherical head


Made from chrome vanadium steel, blades hardened throughout, nickel plated, **extra long**, metric or AF, with spherical head, in folding holder.

Content metric:

WS: Hex 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10

Content AF:

WS: Hex 1/16 - 5/64 - 3/32 - 1/8 - 5/32 - 3/16 - 1/4 - 5/16 - 3/8"

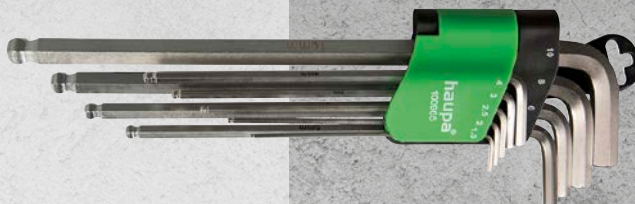

Art. no. 100965


9-pieces, size 1,5 - 10 mm

Art. no. 100967

9-pieces, size 1/16" - 3/8"

Hole saw with edge countersink and board ejector

- For setting wall-flush sockets, Ø 68 mm
- Cutting depth 35 mm
- High concentricity
- Specially for plasterboard, softwood, plywood, Fermacell etc.
- 9,5 mm hexagonal holder
- In plastic box



Art. no. 231929

Ø 68 mm



haupa

... convincing solutions

Ratchet screwdriver set FlexBag

FlexBag

Art. no. 104020-1

51-pieces, Bit: 50 mm

with 50 mm S2 bits and reduced shank, in robust nylon bag.

Ratchet screwdriver with right/left hand motion. Adjustable operating angle of 180°. Safety and special bit set – top quality S2! The screwing grasp also Quick change penholder and 2-components Handle provides for anti-slip and fatiguefree working. The ergonomic form and the soft zones within the pressure area range make a relaxed possible screws.

Contents:

1/4" 50 mm Power bits Tx:

T5, T6, T7, T8, T9, T10, T15, T20, T25, T30, T40

1/4" 50 mm Power bits Hex: H2, H2.5, H3, H4, H5, H6

1/4" 50 mm Power bits PH: 0, 1, 2, 3

1/4" 50 mm Power bits PZ: 0, 1, 2, 3

1/4" 50 mm Power bits slot: 3, 4, 5, 6, 7, 8

1/4" 50 mm Power bits SQ: 0, 1, 2, 3

1/4" 50 mm Power bits Tri-Wing: 1, 2, 3


1/4" 50 mm Power bits PZ/FL 1 & 2

Above bits are in reduced shank except T40, H6, flat: 6, 7, 8 in full hex shank

2 pcs. Adapters: 1/4" 50 mm, 1/4" 80 mm

8 pcs. sockets: 5, 5.5, 6, 7, 8, 10, 12, 13

1 pc of FlexPlus ratcheting driver

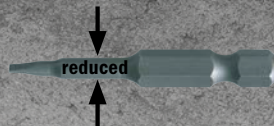

haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

Ratchet screwdriver set FlexBagPro

FlexBag

Art. no. 104022-1


51-pieces, Bit: 50 mm

37 safety bits, 8 spanner sockets, 5 drill bits, in robust nylon bag.

Ratchet screwdriver with right/left hand motion. Adjustable operating angle of 180°. Safety and special bit set – top quality S2! The screwing grasp also Quick change penholder and 2-components Handle provides for anti-slip and fatiguefree working. The ergonomic form and the soft zones within the pressure area range make a relaxed possible screws.

Contents:

- 1/4" 50 mm torsion bits S-TX (hole), color coded: T10, T10, T15, T15, T20, T25, T27, T30, T40
- 1/4" 50 mm torsion bits Hex, color coded: H3, H4, H5, H6
- 1/4" 50 mm torsion bits PH, color coded: 1, 2, 2, 3
- 1/4" 50 mm torsion bits PZ, color coded: 1, 2, 2, 2
- 1/4" 50 mm torsion bits slot, color coded: 3, 4, 4, 5, 6
- 1/4" 50 mm torsion bits SQ, color coded: 1, 2, 3
- 1/4" 50 mm standard bits PZ/FL: 1, 1, 2, 2
- 1/4" 50 mm standard bits PH/FL: 1, 1, 2, 2
- 8 pcs. sockets: 5, 5.5, 6, 7, 8, 10, 12, 13
- 5 pcs. drills: 2, 3, 4, 5, 6
- 1 pc of FlexPlus ratcheting driver



with colour coding



incl. Drill Bits



haupa

... convincing solutions

Socket set

1/4"

Art. no. 110674

33-pieces, 1/4"

Chrome vanadium steel, industrial quality, black plastic case with metal catch.

Contents: 1/4"

- 12 Sockets: 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm,
- 1 ratchet handle,
- 2 gears with quick release function,
- 1 flexible extension bar,
- 2 extension bars 50 & 100 mm,
- 1 universal joint,
- 1 sliding adapter 3/8" x 1/4" for extension bar work as T handle,
- 1 spinner handle for screwdriver
- 14 insert bit socket PH: 1 - 2 - 3,
- HX: 3 - 4 - 5 - 6 - 8,
- TX: 10 - 15 - 20 - 25 - 27 - 30



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.

SocketFlex socket wrench box

1/4" 1/2"

Art. no. 110672

59-pieces, 1/4" + 1/2"

Chrome vanadium steel, industrial quality, black plastic case with metal catch.

Contents:

- 12 1/4" socket wrench inserts 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm
- 2 1/4" 50 and 150 mm extensions
- 1 3/8" x 1/4" adapter for extending for use as a T-handle
- 1 1/4" universal joint
- 1 bit adapter 4-edge to 1/4" hexagonal
- 1 1/4" reversible wratchet
- 13 1/2" socket wrench inserts 10 - 11 - 12 - 13 - 14 - 15 - 17 - 19 - 22 - 24 - 27 - 30 - 32 mm
- 2 1/2" 75 and 250 mm extensions
- 1 3/8" x 1/2" adapter for extending for use as a T-handle
- 1 1/2" universal joint
- 1 1/2" reversible ratchet
- 1 Flex ratchet screwdriver
- 1 adapter 1/4" x 1/4" x 50 mm
- 1 adapter 1/4" x 1/4" x 80 mm
- 4 bits 1/4", 50 mm, PH 0 - 1 - 2 - 3
- 4 bits 1/4", 50 mm, PZ 0 - 1 - 2 - 3
- 2 bits 1/4", 50 mm, PZ/FL 1 - 2
- 4 bits 1/4", 50 mm, slot 3 - 4 - 5 - 6 mm
- 6 bits 1/4", 50 mm, hexagon socket 2 - 2,5 - 3 - 4 - 5 - 6

360° | 110672



haupa

... convincing solutions

Torque wrench

TQ 1/4"

- With built-in changeover ratchet, accuracy +/- 3%
- Material: Chrome-Vanadium steel DIN-3122; ISO 6789
- Measuring range from 5 – 25 Nm
- Drive 1/4"
- With viewing window display and locking mechanism
- Easy to read scale
- In impact-proof storage box



Art. no. 110607

5 – 25 Nm, 1/4"



Torque wrench

TQ 1/2"

- With built-in changeover ratchet, accuracy +/- 3%
- Material: Chrome-Vanadium steel DIN-3122; ISO 6789
- Measuring range from 20 – 120 Nm
- Drive 1/2"
- With viewing window display and locking mechanism
- Easy to read scale
- In impact-proof storage box



Art. no. 110610

20 – 120 Nm, 1/2"



Torque wrench


TQ 1/2"

- With built-in changeover ratchet, accuracy +/- 3%
- Material: Chrome-Vanadium steel DIN-3122; ISO 6789
- Measuring range from 42 – 210 Nm
- Drive 1/2"
- With viewing window display and locking mechanism
- Easy to read scale
- In impact-proof storage box




Art. no. 110609

42 – 210 Nm, 1/2"

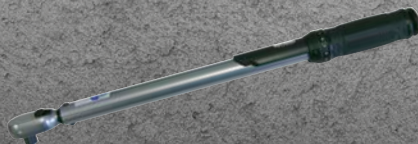

Utility knife professional HUPblackSeries9

- Extremely sharp cutting edge for precise cuts
- Blade length: 80 mm
- Blade width: 9 mm
- Blade thickness: 0.38 mm
- 13 segments
- Double grinding for maximum sharpness
- Ideally suited for a wide range of materials
- Maximum durability due to fire hardening
- Black blade coating



Art. no. 200220


145 mm



Blade dispenser HUPblades9

suitable for Art. No. 200220

- 10 blade strips
- **extremely sharp cutting edge** for precise cuts
- blade length: 80 mm
- blade width: 9 mm
- blade thickness: 0.38 mm
- 13 segments
- double grinding for maximum sharpness
- ideally suited for a wide range of materials
- maximum durability due to fire hardening
- blade black coated



Art. no. 200221


80 x 9 x 0.38 mm



**MADE IN
JAPAN**


haupa

... convincing solutions

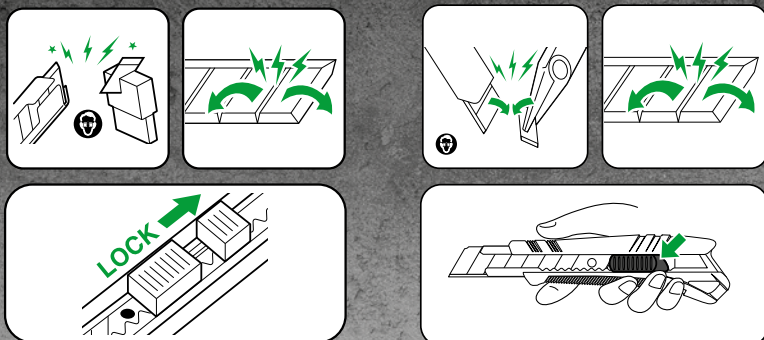

Utility knife professional HUPblackSeries18

- Extremely sharp cutting edge for precise cuts
- Blade length: 100 mm
- Blade width: 18 mm
- Blade thickness: 0.6 mm
- 8 segments
- Double grinding for maximum sharpness
- Ideally suited for various materials
- Maximum durability due to fire hardening
- Black blade coating
- Blade feed with automatic locking device



Art. no. 200222


167 mm



Blade dispenser HUPblades18

suitable for Art. No. 200222

- 10 blade strips
- extremely sharp cutting edge for precise cuts
- blade length: 100 mm
- blade width: 18 mm
- blade thickness: 0.6 mm
- 8 segments
- double grinding for maximum sharpness
- ideally suited for various materials
- maximum durability due to fire hardening
- blade black coated



Art. no. 200223

80 x 9 x 0.38 mm



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
 Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
 Prices upon request. Sales are conducted exclusively through specialized wholesalers.
 Technical changes and printing errors reserved.

LED flashlight, HUPflash1000

- Rechargeable
- Dimmable
- Zoom function

This flashlight is your compact partner for any application where professional lighting is needed.

The flashlight features Twist-Focus technology, allowing you to adjust the light beam by twisting the head. The button enables dimming from 100%, to 50%, and 25%. Enjoy flicker-free, cool white light that reaches up to 100 meters.

Waterproof (IPX7) and powered by a rechargeable lithium-ion battery via a supplied USB cable (USB-C). The battery is a standard commercial cell (18650) and can be easily replaced.

1000 Lm	↑ Ø35 152mm ↓	kg 168 g	USB-C Charge cable included	Lifetime 50000 h
CRI 90	6500 K	60°	IPX7	zoom
Class III	3.7V 2200mAh 8.14Wh	3 - 12h	-10°C - 40°C	100 % 50 % 25 %

Art. no. 130384

Ø 35 x 152 mm

NEW



LED flashlight, HUPflash300

- Splashwater protected
- Dimmable
- Zoom function

This flashlight is your compact partner for any application where professional lighting is needed.

The flashlight features Twist-Focus technology, allowing you to adjust the light beam by twisting the head. The button enables dimming from 100%, to 50%, and 25%. Enjoy flicker-free, cold white light that reaches up to 100 meters.

The flashlight is splash-proof and powered by three AAA batteries (not included).

300 Lm	↑ Ø34 124mm ↓	kg 102 g	Lifetime 50000 h	zoom
CRI 90	6500 K	Class III	120°	IPX4
3x AAA not included	1 - 10h	100 % 50 % 25 %	-10°C - 60°C	

Art. no. 130390

Ø 34 x 124 mm

NEW



haupa

... convincing solutions

LED Pen Torch

- Illumination range: 50 m
- 50 Lm
- LED 1 Watt CREE
- With clip
- 2xAAA batteries

LED 1W CREE	↑ 19.14 x ↓ 143 mm	50 Lm	Lifetime 30000 h
Aircraft Grade Aluminium	50 m	IP54	2xAAA

Art. no. 130328

TL: 14 x 143 mm



LED flashlight, HUPflash120

- Compact pin form
- With magnetic holding clip
- Main and inspection light

Perfect for both industrial and trade applications. The rechargeable penlight has two light sources: at the head and on the side. The penlight comes with a USB-C charging cable.

Each penlight is equipped with a magnetic clip, allowing you to easily attach the lamp to any magnetic surface. The flexible use combined with the compact size makes this penlight very practical for professional use by mechanics, craftsmen, technicians, and others.

120 Lm	↑ 109 x 18 x 16mm ↓	USB-C Charge cable included
CRI 90	5000 K	Class III
95°	IK07	-10°C - 35°C
3.7V 600mAh 2.22Wh	2 - 4h 3h charge time	120lm
70lm spot	Magnetic	

Art. no. 130388

159 x 18 x 16 mm

NEW



LED flashlight, HUPflash800









- Streamlined and compact design
- Strong magnets
- Versatile

Our mini flashlight, specially designed to meet your lighting needs, features three different modes: High mode 500 lumen, Low mode 100 lumen, and Top-LED mode for 150 lumen, as well as the Boost mode: Unleashes a powerful 800 lumen boost by pressing and holding the button (3s).

With its sleek, compact design, aluminium housing, and features such as a base and a clip magnet, it effortlessly adapts to your needs and is ideal for use in industrial and trade applications.

The reliable battery lasts approximately 1.5 hours, eliminating the need for frequent recharging or battery replacement.

Experience simplicity through one-button functionality and efficient charging, ensuring your mini flashlight is always ready for the next job.

800 Lm	\updownarrow 97 x 30.5 x 21mm \updownarrow	 USB-C Charge cable Included
 6500 K	 Class III	
 62°	IPX5	 -0°C - 40°C
 3.7V 1200mAh 4.44Vh	 10h @ 100lm 3h charge time	 100lm - 500lm
 800lm boost	 100lm spot	 Magnetic

Art. no. 130382

97 x 30,5 x 21 mm

NEW





haupa

... convincing solutions

LED headlamp HUPflash155

- 3 W COB LED
- Material: ABS, PC
- Luminosity 155 Lm
- Colour reproduction 90 CRI
- Battery-powered (3 x AAA included in the scope of delivery)
- Variable light intensity, 50% | 100%
- Operating time:
 - approx. 2.5 hours at 100% light intensity
 - approx. 4 hours at 50% light intensity
- Very easy-to-balance headlamp
- Automatically switches on and off, thanks to special **sensor technology**
- Easy to operate e.g. when wearing protective gloves
- **Headband with silicone strips** for secure fastening to work helmets
- Dimensions: 60 x 45 x 38 mm
- Weight: 49 g (without batteries)

LED 3W	60 x 45 x 38 mm	155 Lm	Lifetime 30000 h	ABS PC	kg 90 g
2.5h	3xAAA		 Sensor	 CRI 90	 50 % 100 %


Art. no. 130319

TL: 60 x 45 x 38 mm



LED headlamp HUPflash155+

- **3.7 V 1200 mAh lithium polymer battery**
- 3 W COB LED
- Material: ABS, PC
- Light intensity 155 Lm
- Colour reproduction 90 CRI
- Variable light intensity, 50% | 100%
- Operating time:
 - approx. 2.5 hours at 100% light intensity
 - approx. 4 hours at 50% light intensity
- Charging cable (micro USB) included in the scope of delivery
- Charging time approx. 4 hours
- Very easy-to-balance headlamp
- Automatically switches on and off, thanks to special **sensor technology**
- Easy to operate e.g. when wearing protective gloves
- **Headband with silicone strips** for secure fastening to work helmets
- Dimensions: 60 x 45 x 38 mm • Weight: 73 g

LED 3W	60 x 45 x 38 mm	155 Lm	Lifetime 30000 h	Lithium Polymer Akku 1200 mAh 3.7 V	kg 73 g
2.5h	ABS PC		 Sensor	 CRI 90	 50 % 100 %

Art. no. 130321

TL: 60 x 45 x 38 mm



LED inspection lamp HUPlight400

Art. no. 130378

Length: 160 mm

NEW

- White SMD main LED with 400 Lumens on the front side
- Secondary rear 200 Lumens white SMD-LED
- Additional upper spot - 120 Lumens white SMD-LED
- Extremely rugged design made of nylon and aluminium
- 200° vertically foldable head with super-strong magnetic base
- Loop and hanging system for easy use
- Two strong magnets on the back of the lamp
- IK07 super rugged, impact resistant design
- Large reflector SMD LED
- 5 V charging system for charging the battery
- Integrated USB-C charging port with protective cover
- 1 A direct USB-C charging - 2 hours charging time
- 1 m USB-C charging cable included

Specifications:

- Lithium 3.7 V, 800 mAh, rechargeable
- LED: Front side main 3 W, SMD LED 400 Lm, CRI 90
Back side 1.5 W, SMD LED 200 Lm, CRI 90
Spot 1 W, SMD LED, 120 Lm, CRI 90
- Ambient temperature: -10°C - +45°C
- Operating time: 3 h to 6 h for main LED in front
6 h for rear LED
6 h for spot LED
- Dim switch for the front main LED: 100% - 50%
- Charging time: approx. 2.5 h
- Protection class: III
- USB-C input for charging: 5 V, 1000 mA
- Lamp dimensions: 160 x 37 x 21 mm
- Net weight: 90 g (not including packaging)

LED 3+1,5 +1 W	120/ 200/ 400 Lm
CRI Ra≥90	
Akku Li-Ion 800 mAh 3.7 V	 USB-C
 2,5 h	 IP54
 90 g	 CRI 90





haupa

... convincing solutions

Mini working light HUPlight4

- Rechargeable battery, lithium-ion 1800 mAh 3.7 V
- **4 watt LED**
- Approximately 200 Lumen lighting performance
- Approximately 3 hours lighting performance
- Lamp may be charged using the micro USB port
- Stand may be angled
- Dual magnetic bracket
- Hook for securing and hanging
- Can be used and carried everywhere

LED 4W	120 x 60 x 25 mm	200 Lm	Lifetime 30000 h	Akku Li-Ion 1800 mAh 3.7V
ABS	IP54	100-240V AC 12-24V DC		







Art. no. 130336

4 watt LED



LED working light HUPlight10+3

- Integrated Li-Ion 3.7V / 6.7Ah battery
- **10 watt + 3 watt LED**
- High-quality plastic housing
- For use inside and out, splashproof according to IP54
- Extremely bright illumination, 7000K colour temperature
- 220 Lm (3W LED) + 800 Lm (10W LED) luminosity
- Colour rendering 90 CRI (Colour Rendering Index)
- Variable light output, 50% | 100%
- Operating time
 - 10W LED: - Approx. 3 hours with 100% light output
 - Approx. 6 hours with 50% light output
 - 3W LED: - Approx. 12 hours with 100% light output
 - Approx. 24 hours with 50% light output
- 3.5 hours charging time using power unit supplied
- Charger: 100 - 240 V AC plug-in power supply (5V/2A DC)
- 12V KFZ charging cable
- Adjustable magnetic stand
- With hook for hanging
- With belt clip

LED 10+3 W	220 x 57 x 40 mm	800 + 220 Lm	Lifetime 30000 h	Akku Li-Ion 6700 mAh 3.7V	100-240V AC 12-24V DC
IP54				CRI 90	



Art. no. 130348

10 watt + 3 watt LED



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
 Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
 Prices upon request. Sales are conducted exclusively through specialized wholesalers.
 Technical changes and printing errors reserved.

LED charging station HUPlightWLcharger

Art. no. 130376

265 x 110 x 29 mm

NEW

- Charges two devices simultaneously
- Works with compatible mobile phones
- IK08 impact resistance
- Strong magnets on back side enable easy mounting on magnetic surfaces and integrated screw holes for permanent mounting

Specifications:

- Material: ultra-hard nylon, aluminium, rubber, PC and TPE
- Power adapter: Input: 100 – 240 V~ 50/60 Hz, 0.8 A
Output: 5 V DC, 3.0 A 20 W max.
USB charging cable: USB-C to USB-C x 1 m
- When charging with the wireless pad:
Charge time: approx. 3.0 – 8.0 hours depending on battery pack - the ambient temperature affects the charge and discharge time of the battery
- Operating temperature: -5°C to +30°C
- Charging station dimensions: 265 x 110 x 29 mm
- Net weight: 330 g (not including packaging)

Contents:

- USB power adapter:
Input: 100 – 240 V~, 50/60 Hz, 0.8 A
Output: 20 W, 5 V DC 3.0 A
- USB charging cable: USB-C to USB-C x 1 m



haupa

... convincing solutions

LED work lamp HUPlightWL1000

- Supports wireless charging (charging station HUPlightWLcharger Art. 130376)
- Colour reproduction 90 CRI
- Super bright 1,000 lumens COB-LED
- Super bright spot LED with 300 lumens
- Stand with magnetic base rotates 160 degrees
- Battery status and charging indicators
- Protection class IP65
- IK08 impact resistance

Specifications:

- Main LED: 10 W COB 1,000 LM;
Spot LED: 3 W 300 LM
- Ultra-hard nylon, aluminium, PC, TPE and Fe
- Battery Li-Ion 3.7 V/2,500 mAh, rechargeable
- Power adapter: Input: 100 – 240 V~, 50/60 Hz, 0.8 A
Output: 5 V DC, 3.0 A, 20 W max.
- USB charging cable: USB-C to USB-C x 1m
- Charging time: approx. 2 hours (charging station HUPlightWLcharger approx. 3.5 hours)
- Operating time: 3 – 12 hours
- Operating temperature: -5°C to +45°C
- Lamp dimensions: 72 x 40 x 92 mm
- Net weight: 210 g (not including packaging)

Contents:

- USB charging cable: USB-C to USB-C x 1 m

Art. no. 130374

72 x 40 x 92 mm

NEW



LED 10+3 W	300/ 1000 Lm
CRI Ra≥90	
	Akku Li-Ion 2500 mAh 3.7 V
	USB 2 h 3.5 h
	IK 08
 210 g	CRI 90

LED work lamp HUPlightWL900

- Supports wireless charging (charging station HUPlightWLcharger Art. 130376)
- Colour reproduction 90 CRI
- Super bright 900 lumens COB-LED
- Head rotates 180 degrees
- Focus function, beam angle 20° to 110°
- Luminous range: max. 200 m
- With strong magnetic base
- Battery status and charging indicators
- Protection class IP54
- IK08 impact resistance

Specifications:

- LED: 10 W 900 LM
- Ultra-hard nylon, aluminium, PC, TPE and Fe
- Battery Li-Ion 3.7 V/2,500 mAh, rechargeable
- Power adapter: Input: 100 - 240 V~, 50/60 Hz, 0.8 A
Output: 5 V DC, 3.0 A, 20 W max.
- USB charging cable: USB-C to USB-C x 1m
- Charging time: approx. 2 hours (charging station HUPlightWLcharger approx. 3.5 hours)
- Operating time: 3 - 12 hours
- Operating temperature: -5°C to +45°C
- Lamp dimensions: 47 x 48 x 192 mm
- Net weight: 270 g (not including packaging)

Contents:

- USB charging cable: USB-C to USB-C x 1 m

LED 10W	225/ 450/ 900 Lm
CRI Ra≥90	200 m
Akku Li-Ion 2500 mAh 3.7 V	USB-C
	IP54
IK 08	kg 270 g

Art. no. 130372

47 x 48 x 192 mm

NEW



haupa

... convincing solutions

LED inspection lamp HUPlightWL1500







- Supports wireless charging (charging station HUPlightWLcharger Art. 130376)
- Colour reproduction 90 CRI
- Super bright 1500 lumens COB-LED lamp
- Super bright spot LED with 300 lumens
- Integrated hook – lamp/torch can be positioned in a wide range of angles
- Battery status and charging indicator
- Powerful magnet on the back for hands-free work
- Protection class IP65
- IK08 impact resistance

Specifications:

- LED: 15 W COB SUPERWHITE + 3 W LED
- Lumens: main light 15 W, 1,500 Lm; spot LED 3 W, 300 Lm
- Material: Ultra-robust nylon, aluminium, PC, rubber and TPE
- Battery Li-Ion 3.7 V/4400 mAh, rechargeable
- Power adapter: Input: 100 – 240 V~, 50/60 Hz, 0.8 A
Output: PD 20 W, 5 V DC, 3.0 A, 20 W max.
- USB charging cable: USB-C to USB-C x 1m
- Charging time: approx. 3.5 hours (charging station HUPlightWLcharger approx. 6 hours)
- Operating time: 3.0 – 14.0 hours
- Operating temperature: -5°C to +45°C
- Lamp dimensions: 77 x 171 x 41 mm
- Net weight: 400 g (not including packaging)

Contents:

- USB charging cable: USB-C to USB-C x 1 m

LED 15+3 W	300/ 900/ 1500 Lm
CRI Ra≥90	
	Akku Li-Ion 4400 mAh 3.7 V
	USB 3.5 h () 6 h
IP65	IK 08 
	CRI 90

Art. no. 130370

77 x 171 x 41 mm

NEW



900-1500 Lm



300 Lm



LED set HUPlightWL1500+1000

Set comprising:

Charging station "HUPlightWLcharger" Art. 130376

LED work lamp "HUPlightWL1000" Art. 130374

LED inspection lamp "HUPlightWL1500" Art. 130370

For technical specifications, see respective item

Art. no. 130371

3 pieces

NEW



LED set HUPlightWL900+1000

Set comprising:

Charging station "HUPlightWLcharger" Art. 130376

LED work lamp "HUPlightWL1000" Art. 130374

LED work lamp "HUPlightWL900" Art. 130372

For technical specifications, see respective item

Art. no. 130373

3 pieces

NEW



haupa

... convincing solutions

Compact floodlight HUPLight10pro


- Integrated Li-Ion 3.7V / 4.4Ah battery
- **10 watt LED**
- High-quality and solid housing made of diecast aluminium, with plastic edge protector
- For use inside and out, splashproof according to IP54
- Extremely bright illumination, 6500K colour temperature
- 900 Lm luminosity
- Colour rendering 90 CRI (Colour Rendering Index)
- Variable light output, 50% | 100%
- Operating time:
 - Approx. 3 hours with 100% light output
 - Approx. 6 hours with 50% light output
- Approx. 4.75 hours charging time using power unit supplied
- Can be used to charge external devices via USB (power bank function)
- Charger: 100 – 240 V AC plug-in power supply (5 V/1A DC)
- 12V KFZ charging cable
- Adjustable stand

LED 10W	170 x 121 x 42 mm	900 Lm	Lifetime 30000 h	Akku Li-Ion 4400 mAh 3.7V	100-240V AC = 12-24V DC
IP54	USB	Car	3h	CRI 90	50% 100%
					6500K

Art. no. 130344

10 watt LED

360° | 130344

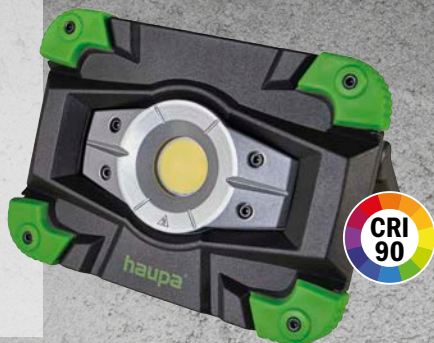

Compact floodlight HUPLight20pro


- Integrated Li-Ion 7.4V / 4.4Ah battery
- **20 watt LED**
- High-quality and solid housing made of diecast aluminium, with plastic edge protector
- For use inside and out, splashproof according to IP54
- Extremely bright illumination, 6500K colour temperature
- 1800 Lm luminosity
- Colour rendering 90 CRI (Colour Rendering Index)
- Variable light output, 50% | 100%
- Operating time:
 - Approx. 3 hours with 100% light output
 - Approx. 6 hours with 50% light output
- 5 hours charging time using power unit supplied
- Can be used to charge external devices via USB (power bank function)
- Charger: 100 – 240 V AC plug-in power supply (12 V/1A DC)
- 12V KFZ charging cable
- Adjustable stand

LED 20W	185 x 135 x 43 mm	1800 Lm	Lifetime 30000 h	Akku Li-Ion 4400 mAh 7.4V	100-240V AC = 12-24V DC
IP54	USB	Car	3h	CRI 90	50% 100%
					6500K

Art. no. 130346

20 watt LED

360° | 130346

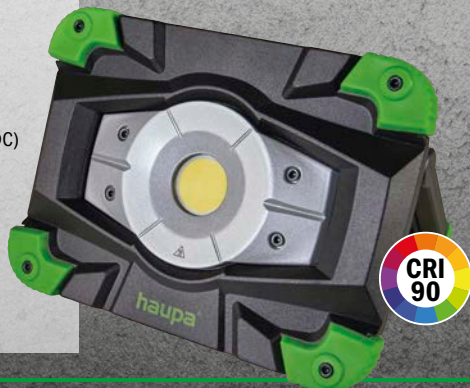

haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
 Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
 Prices upon request. Sales are conducted exclusively through specialized wholesalers.
 Technical changes and printing errors reserved.

Compact floodlight HUlight30pro


- Integrated Li-Ion 7.4V / 5.2Ah battery
- **30 watt LED**
- High-quality and solid housing made of diecast aluminium, with plastic edge protector
- For use inside and out, splashproof according to IP54
- Extremely bright illumination, 6500K colour temperature
- 2500 Lm luminosity
- Colour rendering 90 CRI (Colour Rendering Index)
- Variable light output, 50% | 100%
- Operating time:
 - Approx. 3 hours with 100% light output
 - Approx. 6 hours with 50% light output
- 5 hours charging time using power unit supplied
- Can be used to charge external devices via USB (power bank function)
- Charger: 100 – 240 V AC plug-in power supply (12 V/1A DC)
- 12V KFZ charging cable
- Adjustable stand

LED 30W	185 x 135 x 45 mm	2500 Lm	Lifetime 30000 h	Akku Li-Ion 5200 mAh 7.4 V	100-240V AC = 12-24V DC
IP54	USB	Car	3h	CRI 90	50% 100%
					6500K

Art. no. 130352

30 watt LED

360° | 130352

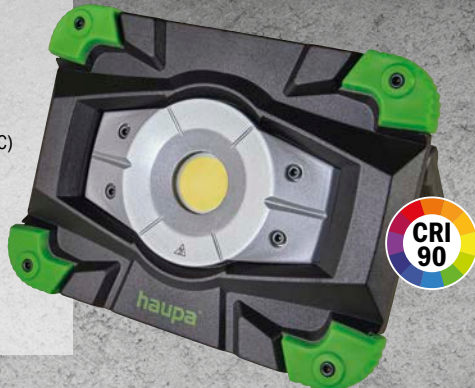

**HUlightpro
Crashtest**



Magnetic lamp holder

- Holder for affixing working lamps
- Suitable for Item Nos. 130344, 130346, 130352
- extra strong magnet for flexible mounting



Art. no. 130343

8,5 x 8,5 x 4 cm



haupa

... convincing solutions

LED construction site lamp HUPlight5200hybrid

- Compatible with 18 V battery systems from Bosch, Makita, Milwaukee, DeWalt, and CAS (Metabo), corresponding adapters included
- 230 V AC or 18 V DC operation with emergency light function
- Designed and certified for use on construction sites, both indoors and for temporary outdoor use

This versatile hybrid (230 V & battery) work light is specially designed for professional craftsmen, mechanics, and construction workers who are often on the go. It comes equipped with a battery holder suitable for 18 V batteries from **HAUPA, Makita, Dewalt, Milwaukee, Bosch (AMP Share), Metabo (CAS)**.

The corresponding adapters are included, eliminating the need to purchase an additional battery system.

The work light is dimmable in two stages (50%, 25%), has a cool white colour temperature (5,000 K), and a colour rendering index of RA >90. The operating time ranges from 2.5 to 9 hours (based on an 18 V/5 AH battery), depending on the selected light output mode. The opal diffuser reduces glare from the 5,200 lumen strong light source and ensures homogeneous illumination of the workplace.

The housing and front diffuser are made of impact-resistant polycarbonate (IK08). The light is dust and splashwater protected thanks to the sturdy battery cover (IP54).

This work light is equipped with technology that prevents overheating and deep discharge of the battery.

The batteries must be charged with the manufacturers' charging stations and are not included.

In addition to batteries, the work light can also be powered by the included 5 m long connection cable H07RN-F 3G 1.5 mm². This work light is equipped with a socket (max. 3000 W), allowing the connection of another light, power tool, or other device, eliminating the need for additional extension cords.

Safety: In the event of a power outage, this work light automatically switches to battery operation within approximately 0.5 seconds, ensuring you never sit in the dark and minimizing the risk of injuries and damage.

LED 40W DC mode 47W AC mode	389 x 342 x 140mm	120°	3550 g
5200 Lm	5000 K	20°C - 45°C	Cable holder
IP54	Lifetime 50000 h	BGI G08 K2	DIM 100%-50%-25%
>IK08	CRI 90	Output DC mode 18 to 21 VDC 2.5A AC mode 230-240VAC 50/60Hz 230mA	35W
4 powertool battery adapters included	1 x Socket 3000W max	H07RN-F 1.5MM² 5m	Class I

Art. no. 130386

389 x 342 x 140 mm

NEW



Domed luminaire HUPlight50combi

- integrated Li-Ion 7.4 V / 6.6 Ah battery
- **50 watt LED**
- extremely resistant housing made of highly impact-resistant plastic
- for indoor and outdoor use, protected against splashing water according to IP54
- Extremely bright illumination, colour temperature 6500 K
- Brightness 4000 Lm
- Colour rendering 90 CRI
- Variable light output, 50% | 100%
- Operating time:
 - Approx. 2 hours with 100% light output
 - Approx. 4 hours with 50% light output
- Charging time approx 2.5 hours
- 2x earthed sockets: 220 – 240 V~AC | Max: 3000 W
- Charging/power source of external / other devices
- Cable: 5 Metre H07RN-F 3G1.5mm²
- Hook for mounting and hanging up
- Carrying handle
- Dimensions: Ø 280 x 260 mm

LED 50W	↑ 280 x 260 mm ↓	4000 Lm	Lifetime 30000 h	Akku Li-Ion 6600 mAh 7,4 V	220 – 240 V 50 / 60 Hz	360°
IP54	2h LED	50% 100%	5m	2x	CRI 90	6500K

Art. no. 130360

50 watt LED



Stand for HUPlight50combi

- Dimensions: 115 x 115 x 300 cm
- Adjustable height maximum 3 m
- Weight: ca. 3,5 kg



Art. no. 130361

Tripod, height: 3 m

haupa

... convincing solutions

HUlightStripe



Ideal for illuminating building sites, especially building shells! The LED light strip can be simply suspended from the ceiling, e.g. with cable ties, and illuminates the work area evenly. Durable and unbreakable, and can be used without any annoying tripods. Can be stowed away as tidily and compact as a cable drum.

Adjustable cable clip with adhesive socket

Material: Polyamide 6.6, halogen-free, UL94V-2, **for fast and secure attachment of the HUlightStripes, all 0.5 m.** With high-quality 3M adhesive pad (adhesive capacity 2 kg on smooth and grease-free surfaces), easy to open and close, reusable thanks to screw hole for drill attachment, colour: natural and black, dimensions: 90 x 12 mm, **contents: 100 units**




Art. no. 262192

Contents: 100 units | Natural



Art. no. 262193

Contents: 100 units | Black




haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.


LED light strip HUPlightStripe15

- Operating voltage: AC 220 - 240 V 50/60 Hz
- Connected load: 180 W
- Colour: neutral white 4000 K
- 180 LEDs per metre
- Total length 15 m + connecting cable 2,5 m
- Can be extended up to 100 metres by means of plug or screw connections
- 120° radiation angle
- Colour rendering index CRI > 90
- Brightness (luminous flux) 19500 Lm
- Protection class 2
- Also for use outdoors IP65
- Light strip must be completely unrolled before use
- Dimensions light strip: W 16 mm x H 8 mm
- Dimensions drum: W 286 mm x D 210 mm x H 338 mm

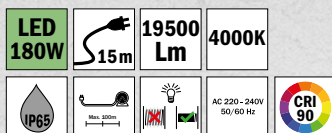


Art. no. 130364

15 m



LED light strip HUPlightStripe25

- Operating voltage: AC 220 - 240 V 50/60 Hz
- Connected load: 300 W
- Colour: neutral white 4000 K
- 180 LEDs per metre
- Total length 25 m + connecting cable 2,5 m
- Can be extended up to 100 metres by means of plug or screw connections
- 120° radiation angle
- Colour rendering index CRI > 90
- Brightness (luminous flux) 32500 Lm
- Protection class 2
- Also for use outdoors IP65
- Light strip must be completely unrolled before use
- Dimensions light strip: W 16 mm x H 8 mm
- Dimensions drum: W 317 mm x D 250 mm x H 385 mm

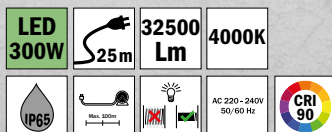

Art. no. 130366

25 m



haupa

... convincing solutions

LED Renovation Light HUPlightEasy

The Renovation Light HUPlightEasy is the quick, affordable, and uncomplicated solution for illuminating construction sites, vacant apartments, storage rooms, etc.

- Impact-resistant polycarbonate housing
- Spring clips
- Lifespan 25,000 hours
- Renovation light including built-in LED bulb with opal diffuser
- Emits neutral white light
- Beam angle of 160 degrees
- 14 cm connection cable, hanger, and spring clip for easy and fast installation without tools
- Lamp body made of impact-resistant polycarbonate and withstands fall heights of up to 2.5 m
- Suitable for use at temperatures from -20 to 45°C.

Note: Renovation light is NOT intended for installation in luminaries.

Contents: 5 pieces


1200 Lm	↕ ø60 ↔ 100mm ↕	LED 10W
CRI 90	4000 K	A60 OPAL
160°	Lifetime 25000 h	kg 80 g
14cm cable push connector	10W = 75W	
-20°C ~ 45°C	2.5m	
⚡		

5x

Art. no. 130380

5 pcs., Ø 60 x 100 mm

NEW



haupa.com

HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany
Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com
Prices upon request. Sales are conducted exclusively through specialized wholesalers.
Technical changes and printing errors reserved.


Deep-hole marker 2-in-1 with a sharpener

One pen – two functions

With a cap: Retractable pencil for precise marking and writing

Without a cap: Deep-hole marker for drilling and installation tasks

- Very stable, with a practical clip
- Sharpener integrated into the push-button
- Graphite universal refill for marking on rough and smooth surfaces
- Ergonomic, triangular form
- Preserves resources and is environmentally-friendly
- Designed for various refills for almost all surfaces and materials
- Refill Leads Art. no. 150045

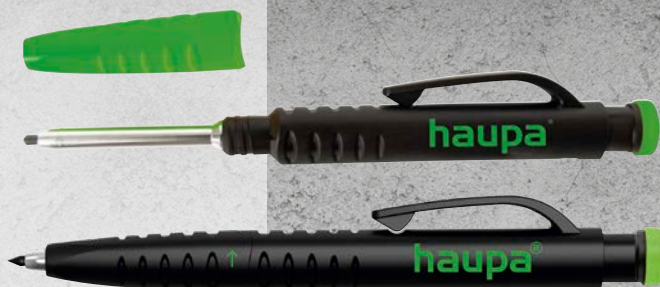

Art. no. 150044

155 mm

2in1

Refills, graphite universal

- Suitable for deep-hole marker Art.No. 150044
- Refills in a dispenser, 6 units



Art. no. 150045

125 mm

haupa

... convincing solutions

Fitter's hammer with 3-component handle

Vibration-free fitter's hammer with 3-component handle.

The hammer head with the forged safety collar according to DIN 1041 and rubber protection sheath is secured mechanically in the handle with a heavy steel wedge. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Benefits:

- Shock-absorbing, therefore gentle on the joints
- High-safety handle is indestructible
- The handle is permanently connected to the hammer head
- Non-slip handle allows ergonomic and safe work
- Highest possible level of safety



Art. no. 180214

Weight 300 g

Art. no. 180218

Weight 500 g

Art. no. 180222

Weight 1000 g


Club hammer with 3-component handle

Vibration-free club hammer with 3-component high-safety handle.

The hammer head with the forged safety collar according to DIN 6475 and rubber protection sheath is secured mechanically in the handle with a heavy steel wedge. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Benefits:

- Shock-absorbing, therefore gentle on the joints
- High-safety handle is indestructible
- The handle is permanently connected to the hammer head
- Non-slip handle allows ergonomic and safe work
- Highest possible level of safety

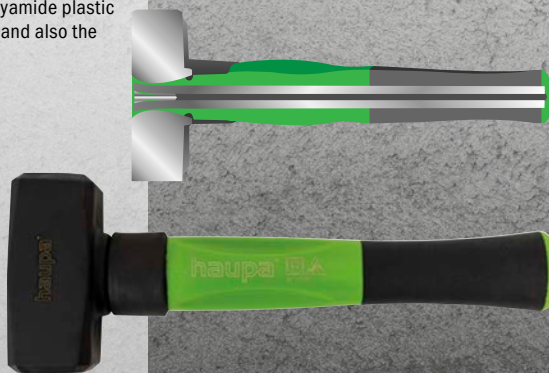

Art. no. 180301

Weight 1000 g

Soft-faced hammer with 3-component handle

Soft-faced hammer with 3-component high-safety handle and steel middle element.

Ideal for firm yet gentle hammering during installation work, alignment and attachment. White polyamide inserts are connected to the middle part by means of a dual-locking attachment system; this guarantees absolute safety at work. The inserts can be replaced and ordered separately. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Note: Not recoil-free!

Benefits:


- Shock-absorbing, therefore gentle on the joints
- Dual-locking attachment system of the polyamide inserts
- High-safety handle is indestructible
- The handle is permanently connected to the hammer head
- Non-slip handle allows ergonomic and safe work
- Highest possible level of safety

Art. no. 180336

Head Ø 32 mm

Art. no. 180338

Head Ø 40 mm

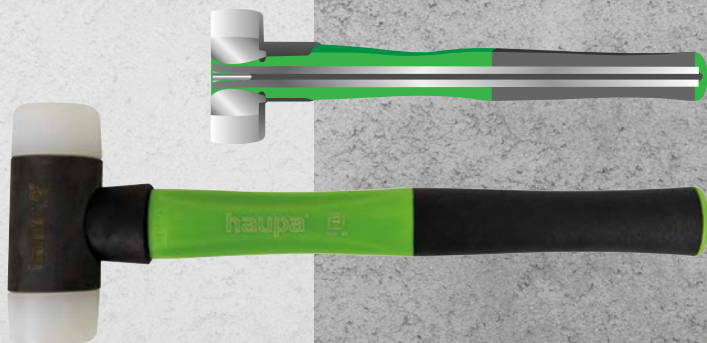

haupa

... convincing solutions

Plastic corrugated tube cutter

For cutting plastic corrugated protection tubes. Body made of magnesium pressure cast, very lightweight and durable.

Two cutting systems:

- Cross-section
with two four-blade knives. System with a service life that is four times longer, thanks to four-way adjustment of the blade of 90°. Tube guidance system for perfect positioning of the tube when cutting; blades lie protected in the body, which prevents damage of the blades and injury to the user.

- Longitudinal cut
with one four-blade knife. System with a service life that is four times longer, thanks to four-way adjustment of the blade of 90°. Blades lie protected in the body, which prevents damage of the blades and injury to the user. Tube contact surface for better guidance of the tube.



Art. no. 200208

14 - 45 mm

Saw handle for bi-metal saw blade

Ergonomic saw handle for flexible bi-metal saw blades. Specially designed for cutting at difficult-to-access places. Optionally, can be used with or without a guide bracket. Various application options (pistol handle and long model). Saw blades can be fitted and replaced without tools.

- Black handle made of high-quality plastic with a pleasant surface
- Galvanised guide bracket
- Knurled nut with a good grip for reliable holding of the saw blade
- Including 300mm bi-metal saw blade 24 Z / inch



Art. no. 200282

313 mm

Our PU cut-protection gloves are used to protect against mechanical risks, in accordance with EN 388 and EN 420. The „Hammer“ pictogram defines the performance level of the product.

EN 388



4544

Example:

Abrasion resistance	→	4
Cut resistance	→	5
Tear propagation strength	→	4
Penetration resistance	→	4



PU textile glove

Ideal for fine mechanical tasks and low mechanical loads

- HPPE fibre
- Thin PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- Excellent fit, pleasant wearing comfort
- Area of use: Warehouse and assembly work, fine mechanical tasks



1
2
3
4



1
2
3
4
5



1
2
3
4



1
2
3
4

Art. no. 120300/6

Size: 6



Art. no. 120300/7

Size: 7



Art. no. 120300/8

Size: 8



Art. no. 120300/9

Size: 9



Art. no. 120300/10

Size: 10



Art. no. 120300/11

Size: 11




haupa

... convincing solutions

PU cut-protection glove, level 3

For high mechanical loads, good cut-protection due to cut-resistance level 3

- HPPE fibre
- PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- Excellent fit, pleasant wearing comfort
- Area of use: Warehousing and assembly work, fine mechanical tasks with slightly sharp objects

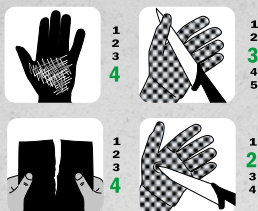

Art. no. 120302/9

Size: 9

Art. no. 120302/10

Size: 10

Art. no. 120302/11


Size: 11



PU cut-protection glove, level 5

High cut-protection thanks to cut-resistance level 5, for high mechanical loads

- HPPE fibre
- Thick PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- Excellent fit, pleasant wearing comfort
- Area of use: Warehousing and assembly work, fine mechanical tasks with sharp objects

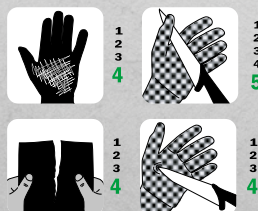

Art. no. 120304/9

Size: 9

Art. no. 120304/10

Size: 10

Art. no. 120304/11

Size: 11



Hand brush short

- Soft Elaston PET bristles
- Unvarnished wooden body
- 29 cm
- Handle with hole for hanging up

Art. no. 393000

29 cm



Metal dustpan with wooden handle

- Made from metal
- Wooden handle with hole for hanging up
- Robust version
- 450 x 230 mm

Art. no. 393006

450 x 230 mm



Bucket

- Made from plastic
- 12 litres | 20 litres
- With carry handle

Art. no. 300102

12 l

Art. no. 300115

20 l



haupa

... convincing solutions

Builders waste sack

- LDPE
- Roll containing 5 sacks
- 75 l
- 100 my
- 575 x 1000 mm

Art. no. 393018

575 x 1000 mm, 5x

Art. no. 393020

700 x 1100 mm, 10x

Waste sack, extra

- LDPE
- Roll containing 10 sacks
- 120 l
- 50 my
- 700 x 1100 mm




Automatic lashing strap 3.5 m x 25 mm

Art. no. 393158

340 daN, 25 mm | 3,5 m

Automatic lashing strap with claw hooks, 25 mm wide and 3.5 m long.

- Easy to use, no threading into the ratchet necessary
- Lashing capacity (LC): 340 daN (direct) / 680 daN (in the strapping)
- 1 piece, claw hooks on both sides
- Maximum length: 3.5 m
- Strap width: 25 mm; strap colour: light green
- Complies with DIN EN 12195-2 for securing loads
- Ideal for securing small loads
- Hook material diameter: approx. 2 x 7 mm
- Minimum length: 350 mm

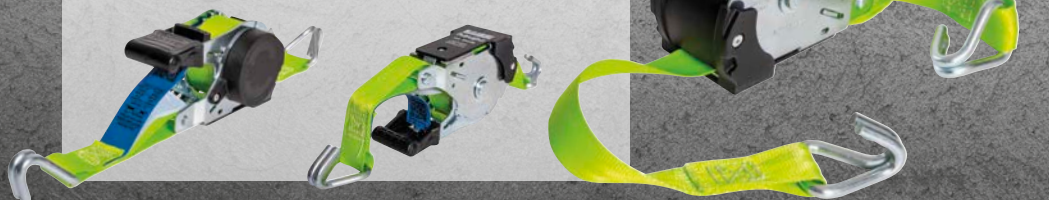

NEW